MORE COLORS MORE VIBRANCY









Bulk ink system

More colors

Industrial performance

Waterbased inks



Built for industrial-level performance

Processing mass volumes of printed garments requires equipment that can meet the dual challenges of high-quality design reproduction and industrial level activity. For this purpose we want to introduce the GTX600 & GTX600 Extra Colors to you, the newest GTX ensures a smooth, highly professional and unique workflow with its many advantages and should therefore be the new member of your company.

- Bulk ink system filter and degassing of all inks
- Steel frame and platen screw drive for speed and long-term durability
- Industrial maintenance station to enable continuous print operations
 - Scalable footprint grow based on your business needs

Built in humidifier

that helps controlling the environment in the machine

White ink recirculatio

in four key areas keeps the ink in a print ready state

4 industrial printheac

with internal cooling fans for longer, continuous print operation



Extra colors

with our two extra colors, orange and green an even more vibrant result can be expected




Extra Colors for more vibrant results

Our GTX600 Extra Colors contains two extra tanks and print heads to achieve an even better color result in the orange and green range.



e More colors for a wider color garmut






E Larger color spectrum possible to ensure the best possible color dynamics



🚱 Two extra tanks for orange and green

C Two extra

printheads for orange and green

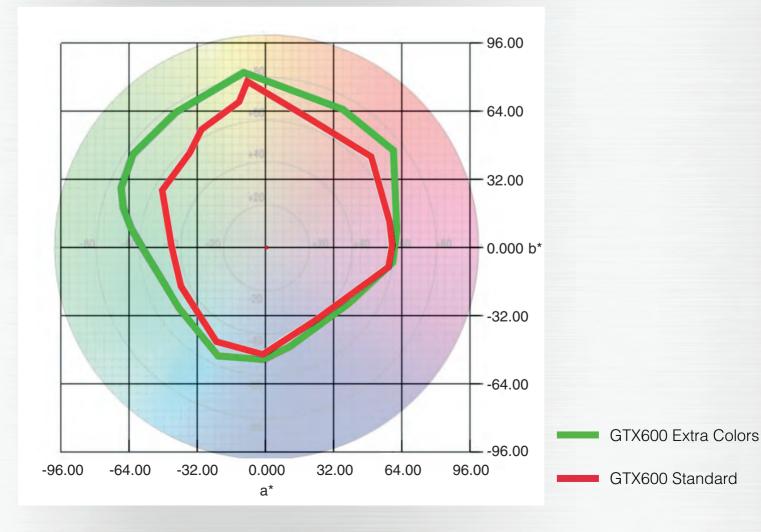

Engineered for leading performance

User experience is becoming more important than ever, a machine should not only function perfectly but also be able to adapt to the needs of its user. Above all, it should be easy to use, to ensure a safe and smooth workflow to provide the highest profit. That's why our GTX600 & GTX600 Extra Colors offers many beneficial features in order to ensure this.

- Quick platen change with variety of sizes different platens for endless possibilities, up to 61cm x 61cm (24" x 24")
- Auto selectable platen height adaptable for many materials heights
- Engineered for operators easier to use, even suitable for operators with minimal experience
- Bulk ink and consumables manufactured by Brother to ensure a consistent, high quality
- Industry leading support through technicians certified by Brother and online support resources

Seamless integration in existing production makes the GTX600 even more flexible for your business needs



At your side for a better future

Environmental friendliness and sustainability are important issues in many areas. We at Brother want to do our part by offering solutions that limit the environmental impact and therefore create a better tomorrow for everyone. However, we also want to maintain our quality standards and have thus come up with a variety of new technologies and possibilities to maintain them.



QP

Reduced ink waste

with wet capping and internal print head ink circulating technology

Less maintenance parts needed Longer part life cycles for key mainteance parts



Waterbased innobella textile ink ECO PASSPORT by OEKO-TEX® and GOTS certified

Built in mist filter will ensure a secure working environment for operators



QØ

Reduced packaging waste Ink available in 9I tanks





Specifications

| Print Method | Direct to garment |
|-------------------------------|--|
| Machine Size | 187cm x 192cm x 146cm (Platen loading) 187cm x 206cm x 146cm (Platen unloading) |
| Machine Weight | approx. 680kg (Platen included) |
| Platen Sizes | Maximum Print Size is 61.0cm x 61.0 cm / 24" x 24" |
| Included Platen Size | 35,6cm x 40,6cm / 14" x 16" |
| Ink Type | Water-based pigment ink |
| Ink-Head Type | On demand piezo head with internal fan |
| Number of Ink-Heads | 4 print heads |
| Number of Ink-Heads | C print heads |
| (Extra Colors) | 6 print heads |
| Print Mode | Single or double for CMYK. Orange and green added for extra colors. Underbase and highlight for white |
| Print Resolution | Maximum 1200dpi x 1200dpi |
| Environment | Standby conditions: 10-35°C, 20-85% (keep away from condensation) Operating conditions:18-30°C, 35-85% (keep away from condensation) |
| Data output | Printer driver (USB, File output, LAN) |
| Power supply | AC 200V-240V (±10%), 50/60Hz(± 1Hz) |
| Power consumption | 5A (maximum) (Reference: 2A during printing) |
| Ink cure | Heat press machine can be used at 180°C (356°F) and 35 seconds duration. For higher volume production, a conveyor oven is recommended to be used at 160°C (320°F) for three and a half minutes. Time and temperature may vary depending on which manufacturer's dryer is used. |
| Pre-treatment | Before printing, apply pre-treatment using either a manual or automatic device and then dry garment using a heat-press, being sure to follow all manufacturer's instructions. Pre-treatment is necessary for white ink. |
| OS | PC- Windows 10 (64-bit) and Windows 11 (64-bit) Mac - macOS® Big Sur to macOS® Ventura |
| Interface | LAN, USB Function, USB Host |
| Platen transport system | AC servo motor with screw driver and solid linear rails Electronic platen height adjustment and automation availability Dual platen height [high/low] sensors for optimal print height |
| Industrial maintenance system | 4 automatic wet suction caps (6 for EC) 4 wet wiper blade systems (6 for EC) |
| Environmental print system | Internal thermostat and hygrometer Integrated evaporated humidifier to control internal humidity level. 6 fans mist gathering system below the platen |
| Optional Accessories | 3 Color status light |
| Driver operating conditions | 2GHz CPU (minimum recommendation) 8GB RAM (minimum recommendation) |
| Display resolution | SXGA(1280×1024) (minimum recommendation) |
| Recommended applications | Adobe [®] Photoshop CC Adobe [®] Illustrator CC CoreIDRAW [®] 2021/2022(Windows) |
| brother | |

brother

Internationale Industriemaschinen GmbH Düsseldorfer Str. 7–9 46446 Emmerich am Rhein, Germany Tel.: +49 (0) 2822 609 0 E-mail: info@brother-ism.com Web: garmentprinter.global.brother







